



# Setting Up Your Apple IIc





At last! A powerful computer that's easy to use and even easier to set up. You won't need help, but if others in your family or office will be using the Apple IIc, encourage them to share in setting up your new computer system. The fun starts here and so does the learning.



## Setting Up Your Apple IIc



computer  
even  
won't  
is in your  
e using  
ge them  
your new  
fun  
s the



---

## Introduction

One of the great things about the Apple IIc is that it has the circuitry for all sorts of accessories (or **peripheral devices**) built in. To add a device to your computer system, all you do is plug a cable into a port on the back of the machine. (Ports are sort of like electrical outlets, except that each one is specifically designed for the kind of peripheral device that can be connected to it.)

This booklet will show you how to attach peripheral devices to your Apple IIc and how to keep your peripheral devices working like new. But there's no need to read *Setting Up Your Apple IIc* from front to back. Read the pages that apply to your peripheral devices and skip the rest. But before you jump to the installation section, take a minute to read these general instructions.

### Unpacking the Apple IIc

You're probably eager to get your Apple IIc up and running. (In fact, you're demonstrating unusual restraint if your computer is still in the box.) But hold your horses. Take a quick inventory before you start setting up the computer.

Check the picture on the opposite page and make sure you have everything you're supposed to have. If you're missing anything, contact your dealer. If everything's in order, fill out the warranty card and mail it in. The card registers you as an Apple owner so you can be notified of important changes to Apple products. (The warranty asks for the Apple IIc serial number—you'll find it on the bottom of the computer.)



l sorts of  
nputer  
Ports are  
l for the

e IIc and  
d to read  
to your  
n section,

e  
hold your

ng you're  
hing's in  
an Apple  
e  
m of the




Two Books

Apple IIc

Five Disks


Power Cable



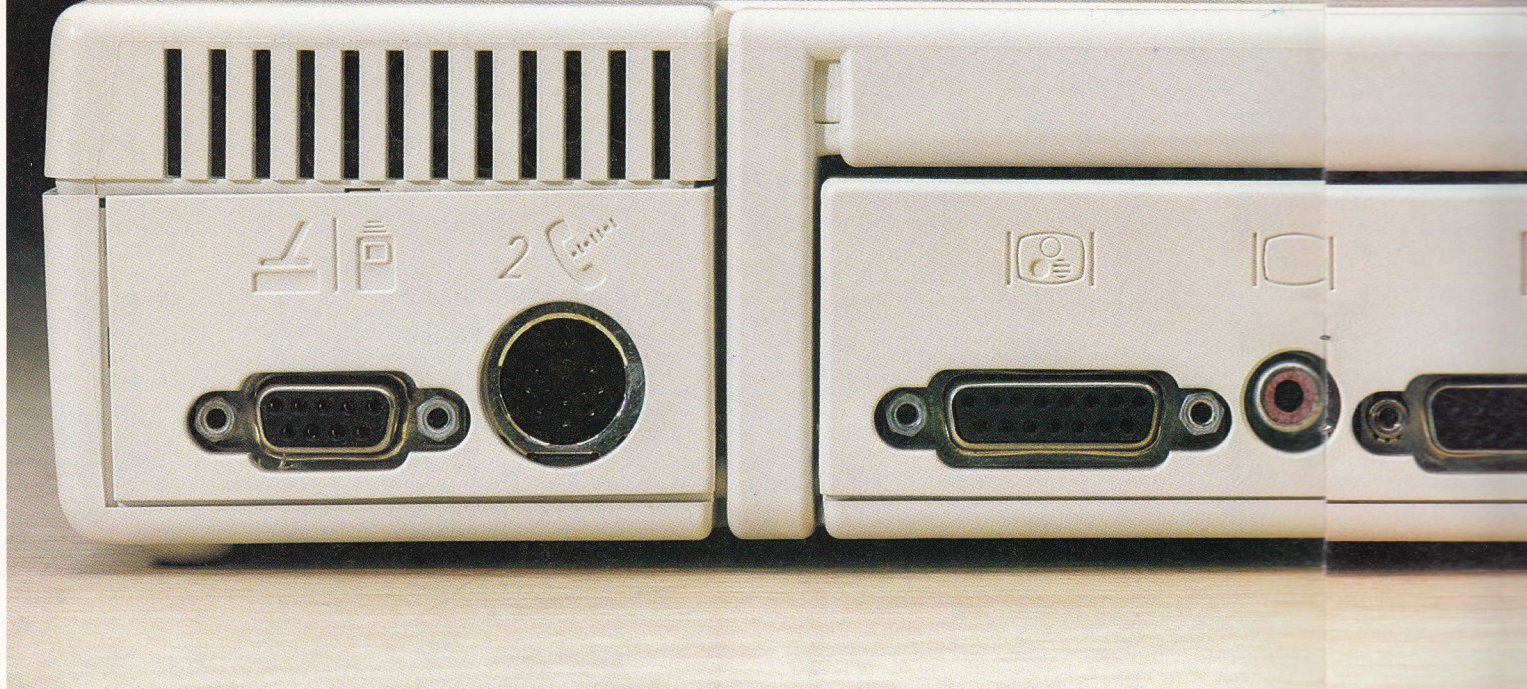

## Installation Instructions

This illustration gives you an overview of how to connect various peripheral devices to your computer. Connecting peripheral device cables to the Apple IIc is a snap because there are symbols above each port showing you which device goes where.



Joystick  
Hand Controls




Mouse




Modem



Phone Jack






Flat Panel Display



Video Monitor





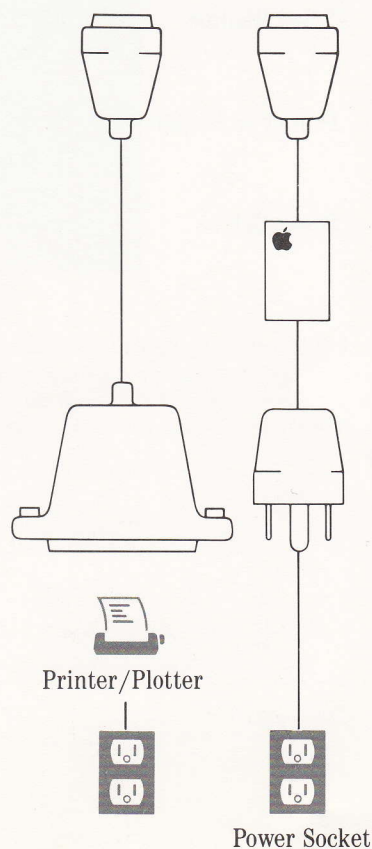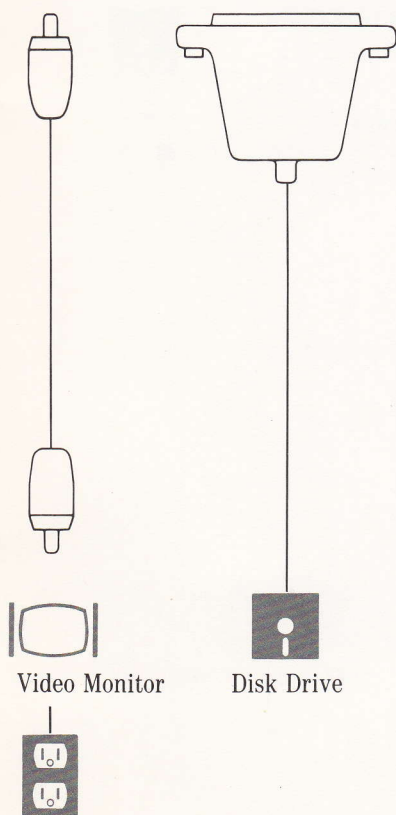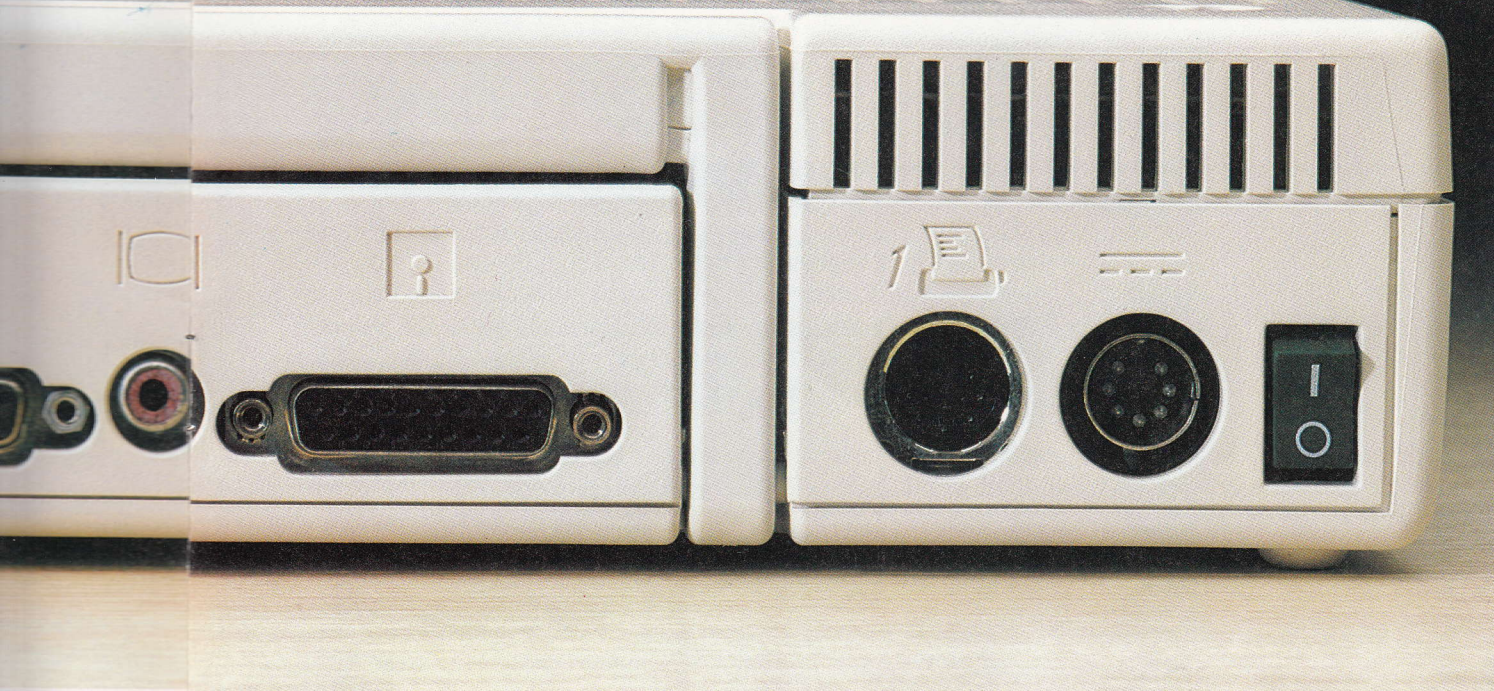

**▲ Warning**

Before you plug anything into the back panel of the Apple IIc, make sure the power switch (on the far right as you face the back of the computer) is set to 0 for off, and that the power cord is unplugged from the wall.

**About Your Cables:**

The Apple IIc and all Apple IIc peripherals come with shielded cables. If you use other devices with your Apple IIc, make sure the cables are shielded.



## Retaining Screws

Some connectors have small screws on either side. Tightening these screws keeps you from accidentally losing touch with your accessories—by making a strong connection between the cable and the computer—and eliminates any possibility of interference that could affect television or radio reception in the area. See the *Apple IIc Owner's Manual* for more information about preventing radio frequency interference. (You may need a small screwdriver to tighten and loosen the screws.)

## Table of Symbols

Most of the symbols on the Apple IIc back panel are self-explanatory. If you have any questions about which device or devices a symbol represents, check this chart:

Joystick or Hand Controls



Mouse



Modem



Television Set



Video Monitor



External Disk Drive



Printer or Plotter



Headphones



Power Cable



### Plugging In the Power Cable

Locate the power cable—it's the thick cord with the box in the middle. (The box is a power transformer. It converts the 110 volts from the wall outlet to the 12 volts DC needed to power the computer.)


1. Make sure the power switch is set to O for off (press down on the lower half of the switch).
2. Plug the power cable into the back of the Apple IIc.
3. Plug the power cable into a three-hole, grounded outlet.

If you have more than two devices that need to be plugged into the wall, you should invest in a power strip. A **power strip** is like a wall socket with four to eight outlets. Many power strips have an on/off switch so you can turn all your devices on and off with one switch.



**▲ Warning** | This equipment is intended to be electrically grounded. This product is equipped with a three-wire grounding plug—a plug having a third (grounding) pin. This plug will fit only a grounding-type AC outlet. This is a safety feature. If you are unable to insert the plug into the outlet, contact a licensed electrician to replace the outlet with a properly grounded outlet.

Do not defeat the purpose of the grounding plug!

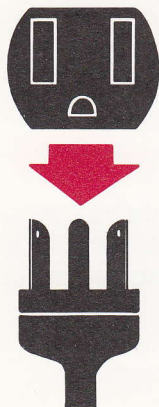

### Important Safety Instructions

For your own safety and the safety of your equipment, always take the following precautions:

Be sure the power plug is disconnected (disconnect by pulling the plug, not the cord)

- If the power cord or plug is frayed or otherwise damaged;
- If anything is spilled into the case;
- If the product is exposed to rain or any other excess moisture;
- If the product has been dropped or if the case has been otherwise damaged;
- If you suspect that the product needs servicing or repair;
- Whenever you clean the case (use only the recommended procedure given below).

Be sure that you always do the following:

- Keep the product away from sources of liquids, such as wash basins, bathtubs, shower stalls, and so on.
- Keep the product protected from damp or wet weather, such as rain, snow, and so on.
- Read all installation instructions carefully before you plug in the product to a wall socket.
- Keep these instructions handy for reference by you and others.
- Follow all instructions and warnings dealing with the product.


#### ▲ Warning

Electrical equipment may be hazardous if misused. Operation of this product, or similar products, must always be supervised by an adult. Do not allow children access to the interior of any electrical product and do not permit them to handle any cables.

To clean the case, do the following:


1. Disconnect the power plug. (Pull the plug, not the cord.)
2. Use a water-damp, clean, soft cloth. Wipe the surfaces lightly, but *do not wipe the screen of the monitor*. For cleaning the monitor screen, use only the special cloth provided and do not moisten it.



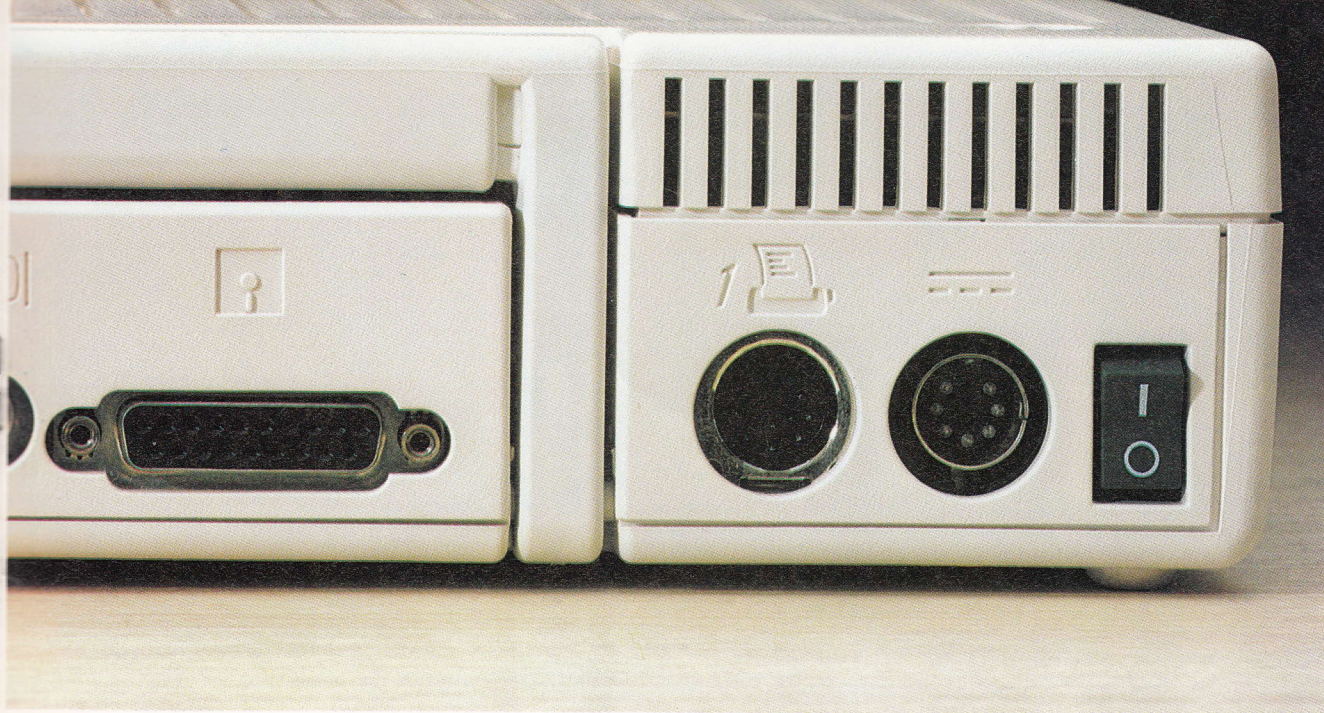

When you finish connecting your disk drive, set it to the left of your Apple IIc or far enough away on the right so there's room to get disks in and out of the built-in disk drive. Do not set your disk drive on top of the Apple IIc—it would block the air vents.



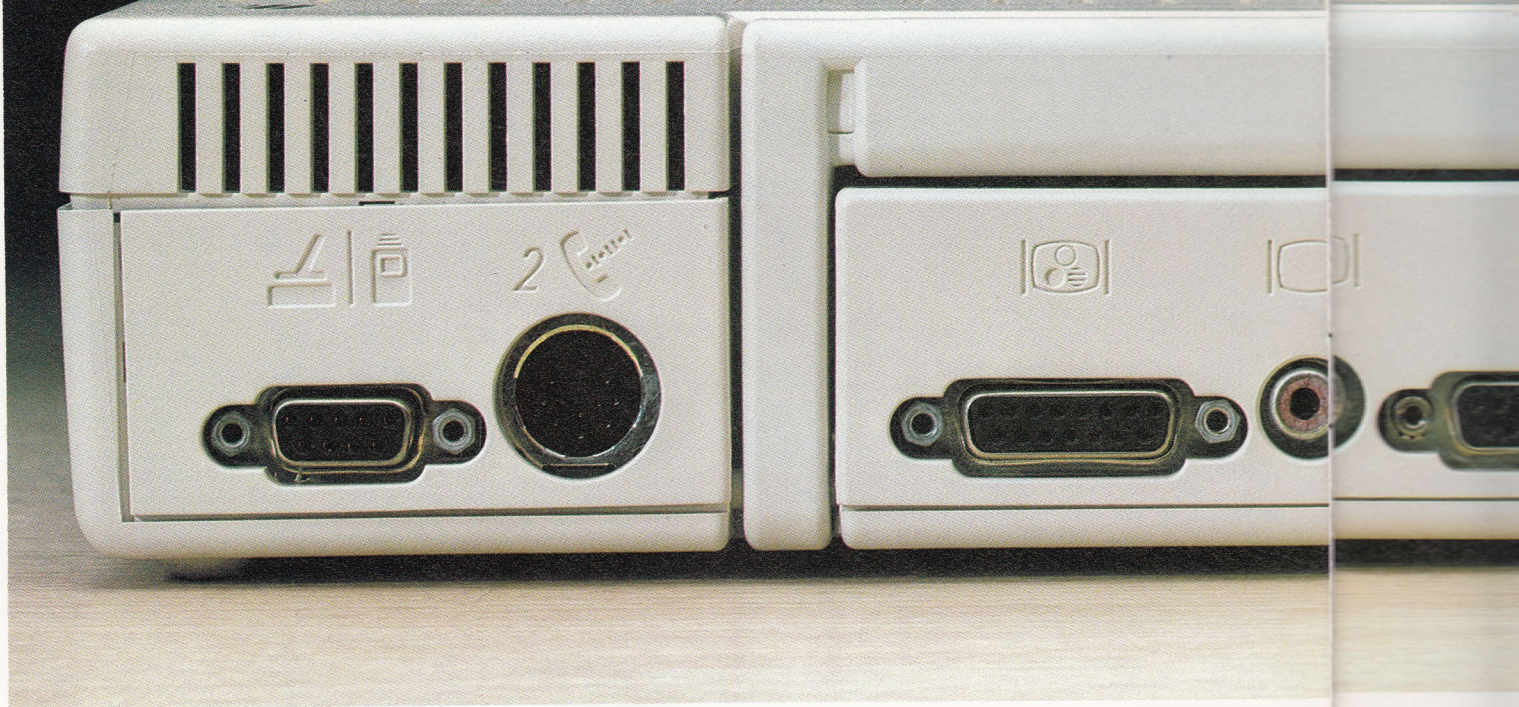


## Printer or Plotter

1. Make sure the Apple IIc and printer or plotter power switches are off.
2. Attach one end of the printer cable to the printer and tighten the retaining screws.
3. Attach the other end of the printer cable to the Apple IIc.
4. Plug the printer power cable into the printer.
5. Plug the other end of the printer power cable into a three-hole, grounded outlet.


Finish setting up your printer or plotter according to the instructions in the manual that came with it. (If you're new to computers, you might want to go through the *Apple IIc Owner's Manual* and get more comfortable with the Apple IIc before you finish setting up your printer.)



2




3



4

It's All  
Referen  
printer  
the plo



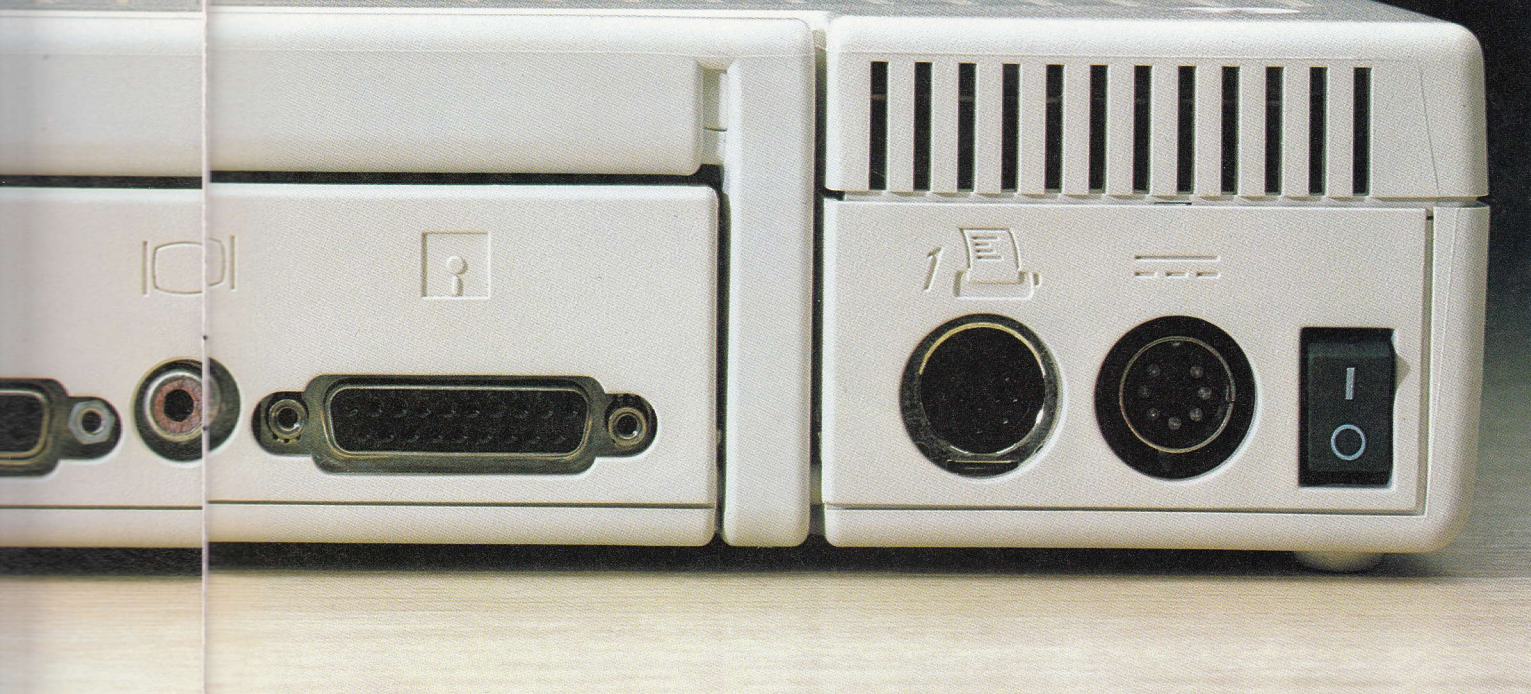

**It's All the Same:**

References to the printer or printer cable also apply to the plotter.


**Printer and Plotter?** If you have both a printer and a plotter, you can plug the plotter into the modem port. Then read the section on configuring serial ports in the utilities booklet.

**Important!** If you're using a printer other than the Apple Imagewriter or Scribe®, read the section on configuring serial ports in the utilities booklet before attempting to use your printer.

**Connecting Other Printers:**

These photos show how to connect a Scribe to the Apple IIc. Connecting an Imagewriter is just as easy. The only difference is in the location of the outlets on the printer.



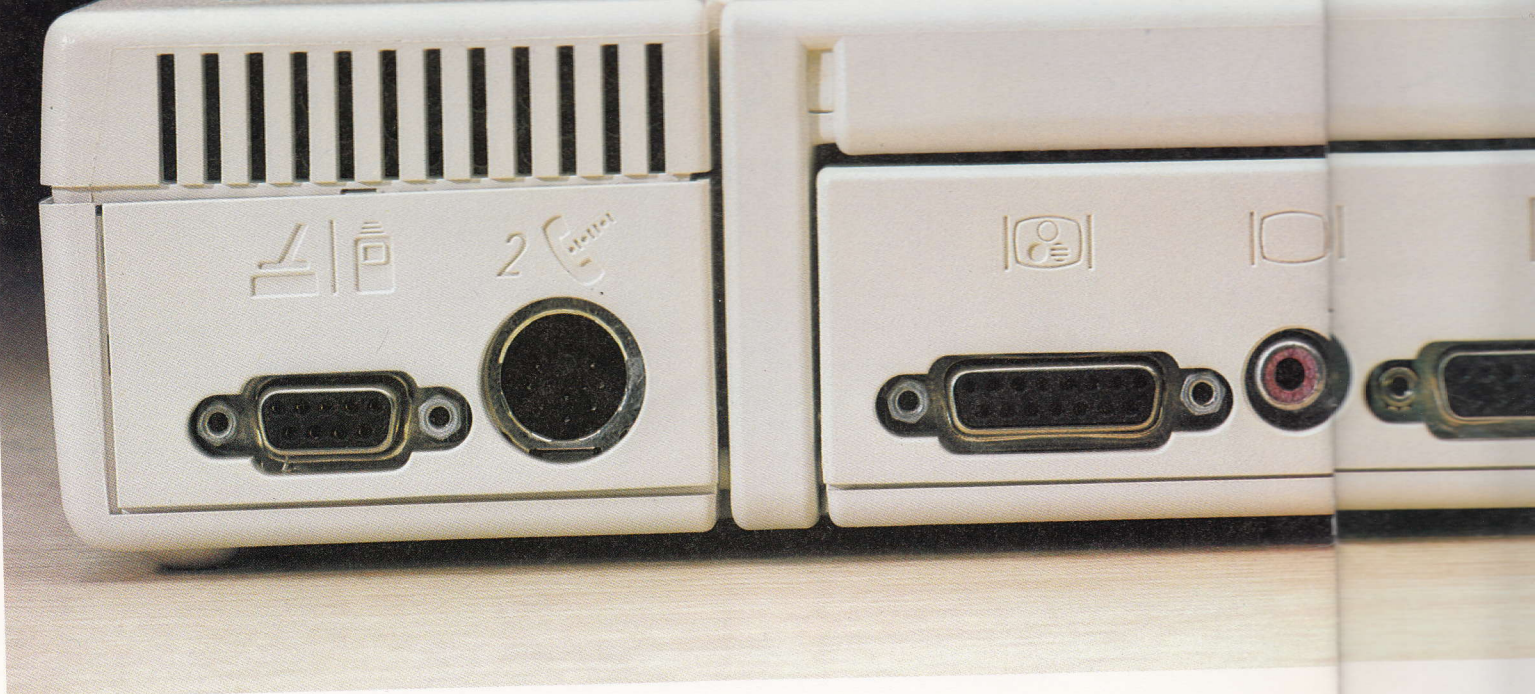

## Modem

Three cables came packed with your modem: a power cable, a phone cable, and a modem cable.

**Important!** If you're going to be using a modem with your computer, make sure there's a phone jack in the vicinity.

1. Make sure the Apple IIc and modem power switches are off (the down position).
2. Attach the modem cable to the modem and tighten the retaining screws.


3. Attach the modem cable to the Apple IIc.

4. Unplug your current phone cable from the phone, and plug it into one of the two identical phone jacks on your modem.

5. Take the  
came with  
plug one e  
phone jack  
the other  
jack on th  
is necessa  
use your p  
and outgo



2




3



4

5



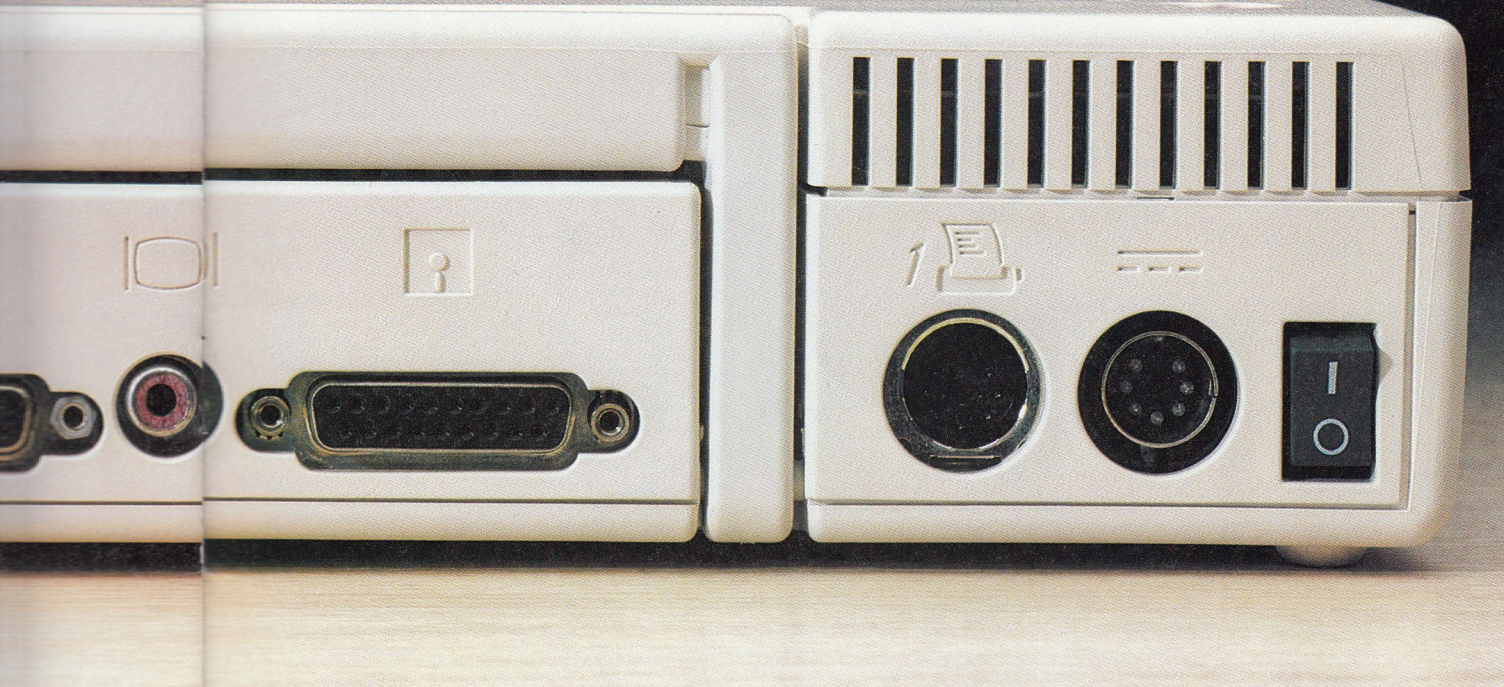


cable to  
nt phone  
nd plug  
identical  
modem.

5. Take the phone cable that came with your modem and plug one end into the other phone jack on the modem and the other end into the phone jack on the phone. (This step is necessary only if you plan to use your phone for incoming and outgoing calls.)

6. Plug the small end of the modem power cable into the modem.

7. Plug the large end of the modem power cable (the transformer) into a three-hole, grounded outlet.


Finish setting up your modem according to the instructions that came packed with it. Then read the section on configuring serial ports in the utilities booklet.



5




6



7



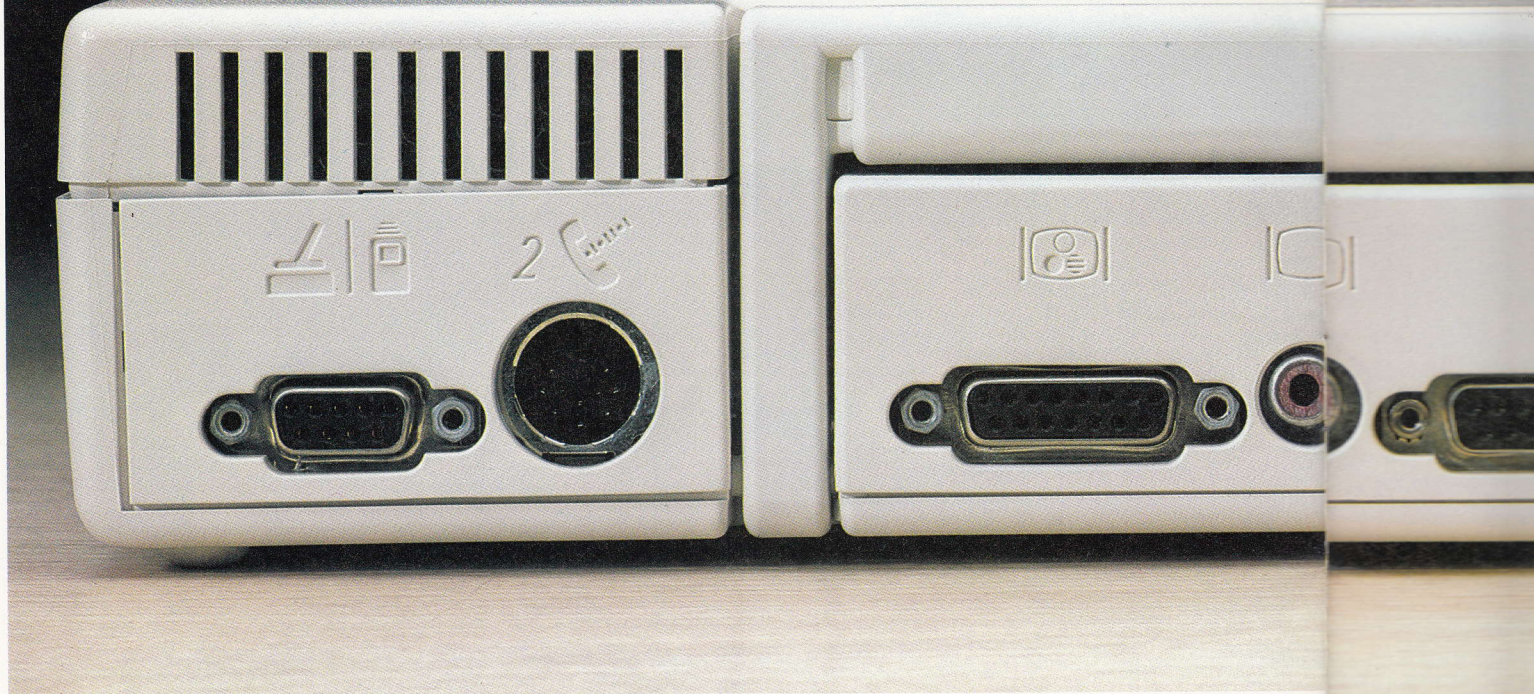

## Mouse, Joystick, Hand Controls

1. Make sure the Apple IIc power switch is off.
2. Plug the cable for the mouse, joystick, or hand controls into the Apple IIc and tighten the retaining screws.


If you're using the mouse, clear plenty of space next to the computer so you'll have room to roll the mouse across your desktop.

### ▲ **Warning**

The mouse, the joystick, and the hand controls all plug into one port on the back of the Apple IIc, so you can use only one of these devices at a time. If you want to switch from using the mouse to using the joystick or hand controls, be sure to turn off the power before making the change.





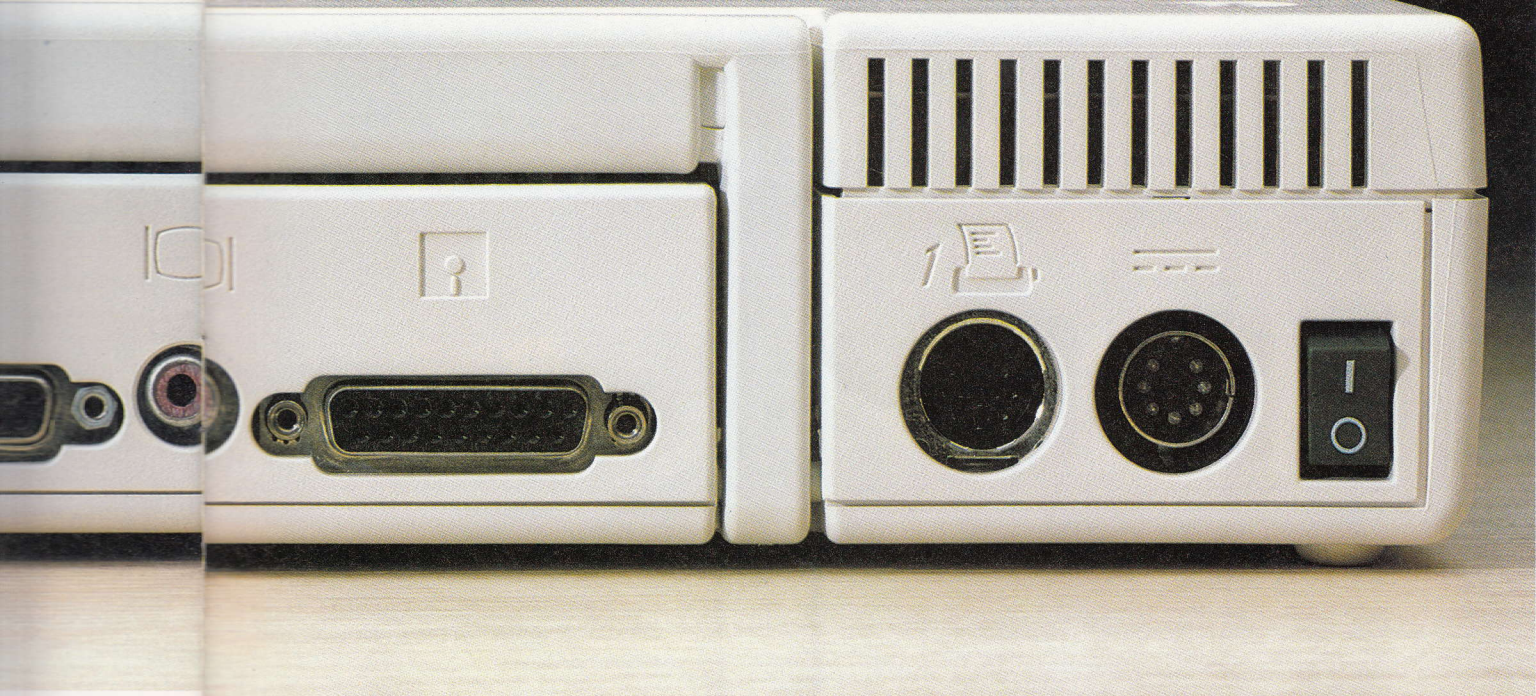


## Headphones

Headphones aren't available from Apple Computer, Inc., but you can use the same type of stereo headphones with the Apple IIc that you use for a portable radio.

1. Plug the headphone cable into the port on the lower-left side as you face the Apple IIc.
2. Check the volume before putting on the headphones. The volume control dial is located next to the headphone port.



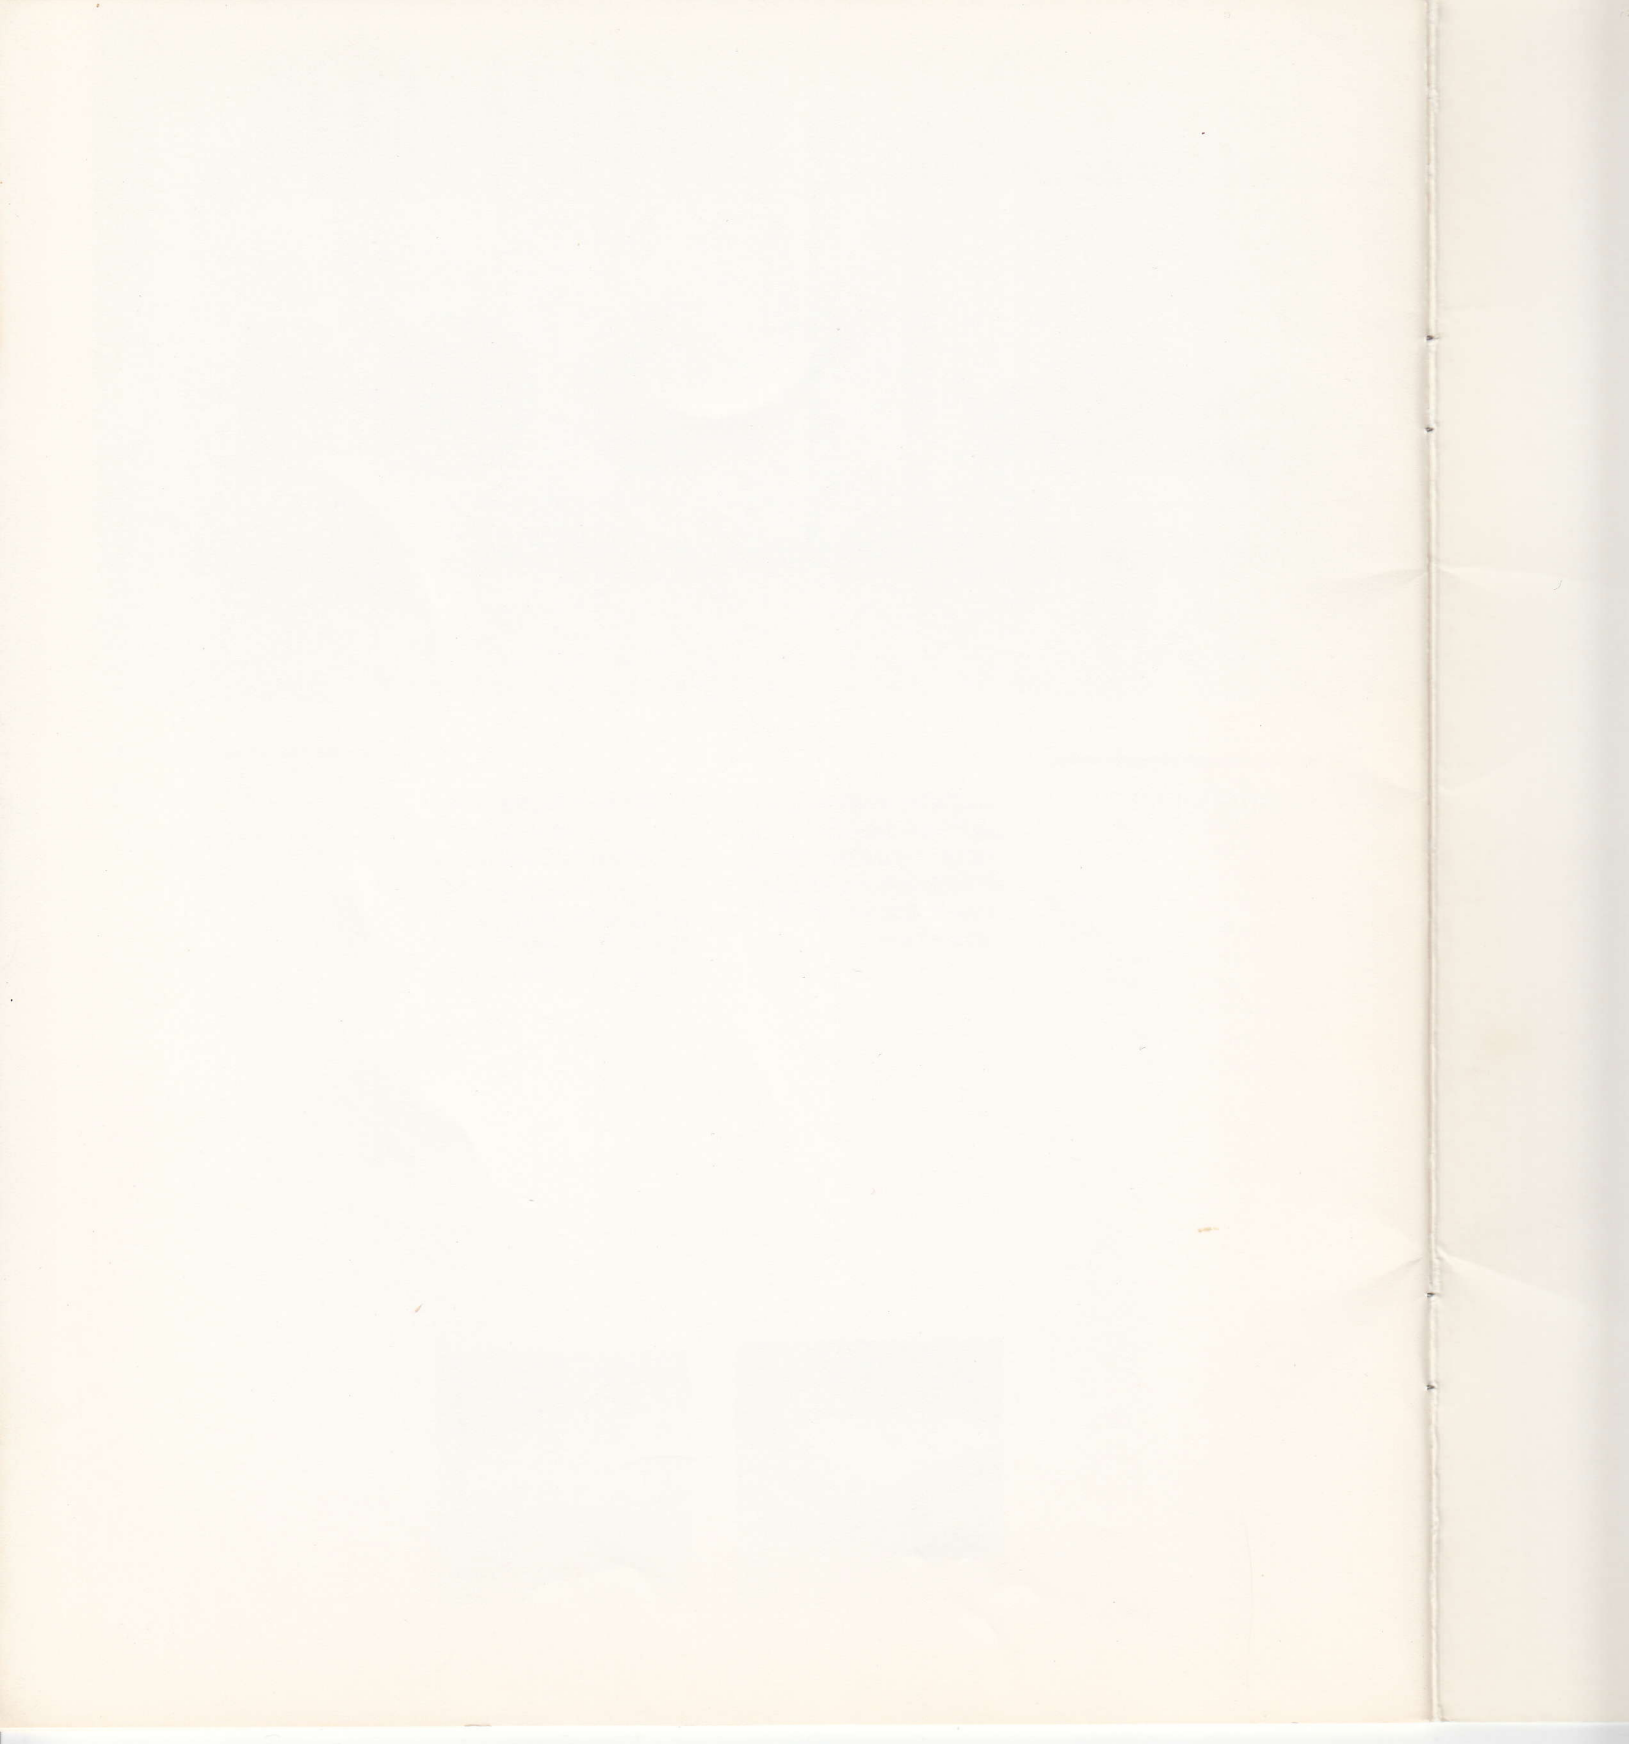







Apple Computer, Inc.  
20525 Mariani Avenue  
Cupertino, California 95014  
408 996-1010  
TLX 171-576

030-1127-A  
©1984 Apple Computer, Inc.  
Printed in U.S.A.